

DESIGNCORE[®] RSP-TX2 DEVELOPMENT KIT



Deploy the power of NVIDIA[®] Jetson[™] processors in your autonomous or deep learning application

Rugged Sensor Platform (RSP) with NVIDIA Jetson TX2 Processor

CONNECT MULTIPLE VISION AND SPATIAL SENSORS TO THE JETSON TX2 FOR DEPLOYMENT IN RUGGED SYSTEMS.

The DesignCore[®] NVIDIA Jetson TX2 Rugged Sensor Platform (RSP) provides six (6) high speed SerDes inputs for a variety of vision and spatial sensors. It speeds development of your autonomous and deep learning applications.

Wi-Fi[®], Bluetooth[®], Gigabit Ethernet and USB 3.0 interfaces are available for control and data offload. There are two (2) independent HDMI displays. SSD and eSATA expansion is available for hours of raw data storage capability.

The RSP's ruggedized enclosure and connectors make it ideal for deployment in the field.

D3 Engineering offers cameras, radar sensors, and software design examples to help you get started. D3 can also provide customization services to interface other sensors or create new Jetson-based designs to meet your requirements.

FEATURES

- NVIDIA Jetson TX2 SOM
- 6x SerDes Input Channels
FPD-Link[™] III or GMSL2
- 2x HDMI
- 1x Gigabit Ethernet
- 1x USB3
- Wi-Fi/Bluetooth
- Available SSD expansion



APPLICATIONS

- Artificial Intelligence at the Edge
- Camera Monitoring Systems
- Industrial Vehicle Systems
- Machine Vision
- Robotics
- Autonomous Machines


SPECIFICATIONS

| | |
|-----------------------|---|
| GPU | NVIDIA Pascal [™] , 256 CUDA cores |
| CPU | HMP Dual Denver 2/2 MB L2 + Quad ARM [®] A57/2 MB L2 |
| DDR | 8 GB LPDDR4 |
| eMMC | 32 GB |
| Inputs | 6x FPD-Link [™] III or GMSL2 Coax (see ordering info) |
| Deserializers | TI FPD-Link [™] III: DS90UB954 Maxim GMSL2: MAX9296A |
| Coax Input Connectors | FAKRA 59S2AQ-40MT5-Z_1 |
| Display | 2x HDMI 1x DSI |
| Storage | SD card slot eSATA connection SSD M.2 slot |
| Data Transfer | 1x Gigabit Ethernet 1x USB3 802.11ac WLAN Bluetooth |
| I/O Interfaces | Programmable logic for synchronization GPIO RS-485/RS-422 CAN RS-232 Console for debug |
| Power | 9–40V DC with reverse battery protection |
| Operating Temperature | –20 to 85°C |
| Enclosure | Rugged aluminum, fan cooled |



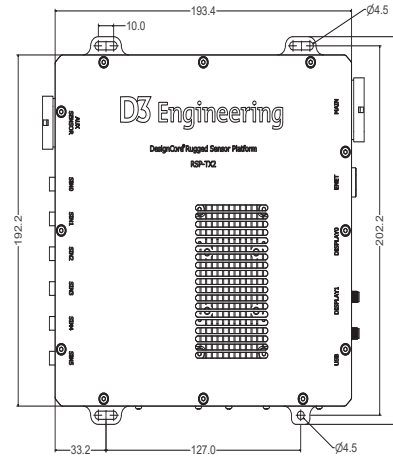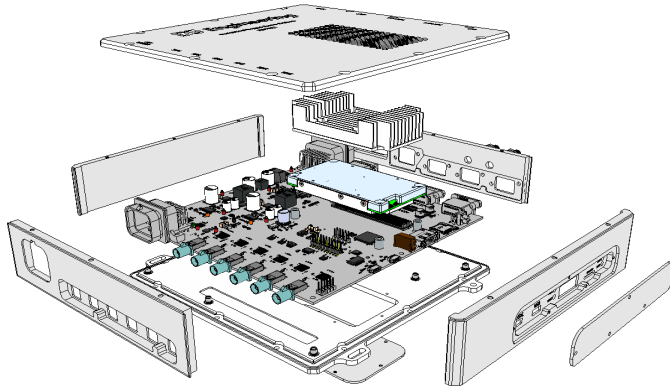

Measurements in mm

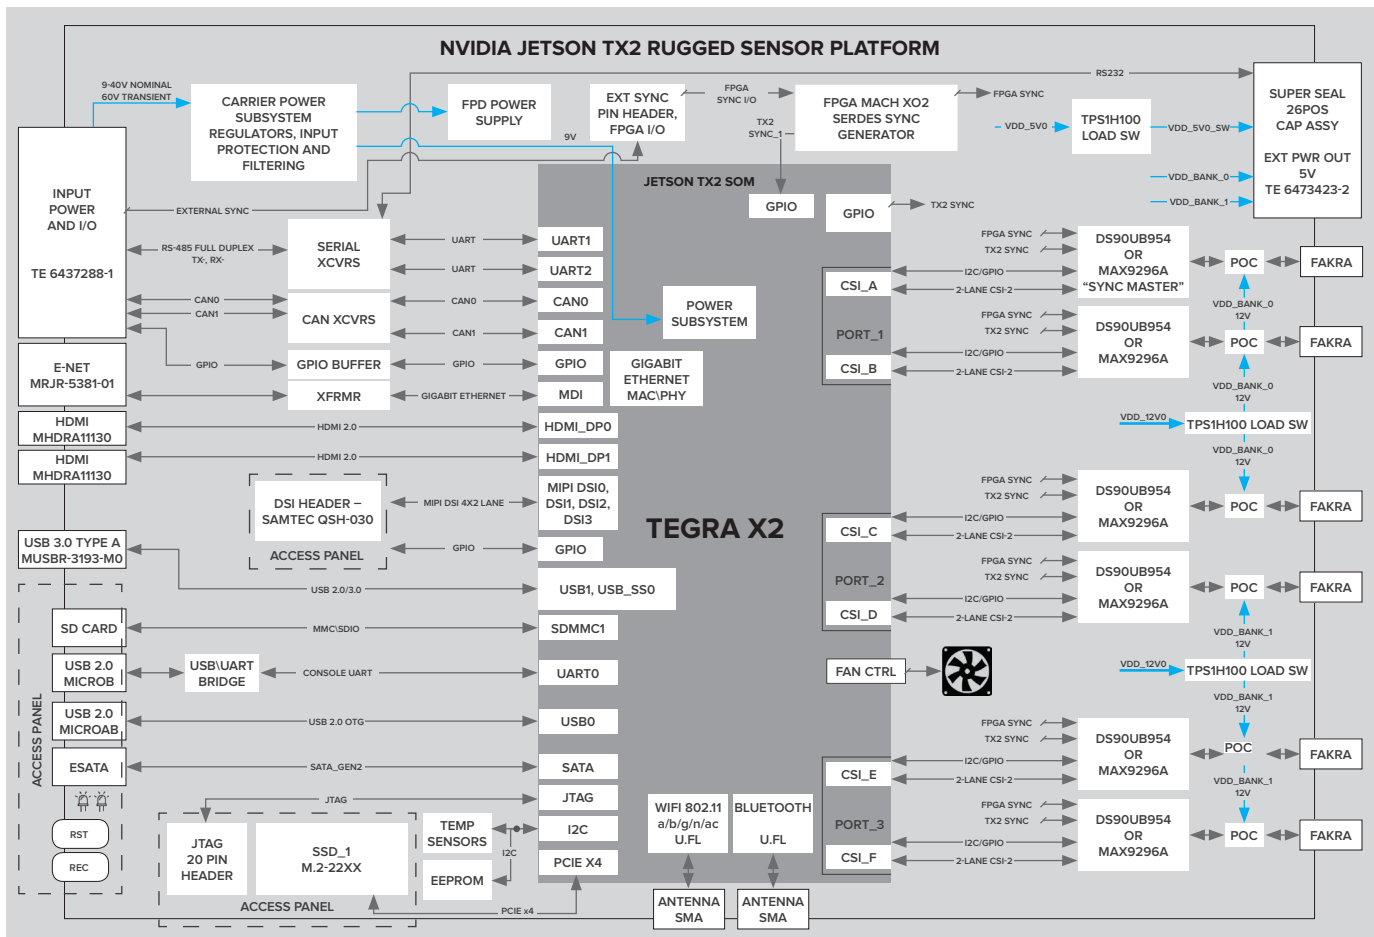

ACCELERATE TIME TO MARKET WITH D3

D3 Engineering speeds embedded system development with our proven DesignCore® development platforms, camera and radar modules, and full-cycle embedded product development services. Our expertise in imaging system design and our status as an NVIDIA Jetson Preferred Partner will help you get to market faster, while reducing the risks and costs of new product development.

ORDERING INFORMATION

FPD-Link™ III input

SKU 1000878 | DesignCore® RSP-TX2 Development Kit

GMSL2 input

SKU 1000872 | DesignCore® RSP-TX2 Development Kit

Buy online at <https://d3engineering.com/store>

CALL: 585-429-1550

EMAIL: sales@D3Engineering.com

VISIT: D3Engineering.com